



AMENTIS



THE LIGHTING PEOPLE

Smart
LED RANGE

A woman with long brown hair and bangs is looking directly at the camera. She is holding a glowing, spherical light fixture in her hands. The background is a blurred city skyline at night with warm, orange and yellow lights. The overall mood is warm and inviting.

AMENTIS
THE LIGHTING PEOPLE



COMPANY INTRODUCTION

Amentis is registered brand through which we deliver medium and higher range products in domestic market.

After 12 years of endeavors, the group has undergone continuous development and expansion for providing better lighting for the customers. Our group owes its success to reliable quality, reasonable price & excellent marketing skills which made us in possession of many stable clients.

We as a manufacturing company specialization in lighting & lighting fixture products has constantly looked forward in cutting edge products and advanced technologies in the market and has made efforts to provide customers with added value through its business activities in good faith.

Taking best solutions as our starting point, we are constantly involved in the development of daring and positive business activities.

It is our aim to continue to provide our customers with the very best in cutting-edge solutions. We will continue to grow as a top-class specialized-technology manufacturing company that provides top class products incorporating the most innovative technology expertise and information with excellent coordination skills and global-support systems.



When it comes to Exclusive Lighting Options,

Amentis presents a premium range of LED Lights.

Amentis range of LED Lights are manufactured

with utmost precision and defining a unique style

for different range.

Performance is the core objective of Amentis

through which satisfaction with quality is

achieved.



LINEA 20-ROUND REFLECTOR SPOTLIGHT


MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN20-6RR	3	6	74 x 34	66 x 25	40	40°
ALLN20-8RR	4	8	54 x 54	45 x 45	40	40°
ALLN20-12RR	6	12	134 x 33	125 x 26	40	40°
ALLN20-18RR	9	18	73 x 73	65 x 65	40	40°
ALLN20-20RR	12	20	COMING SOON			

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 40° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK


Control Type :



LINEA 20 SPOTLIGHT - ROUND REFLECTOR

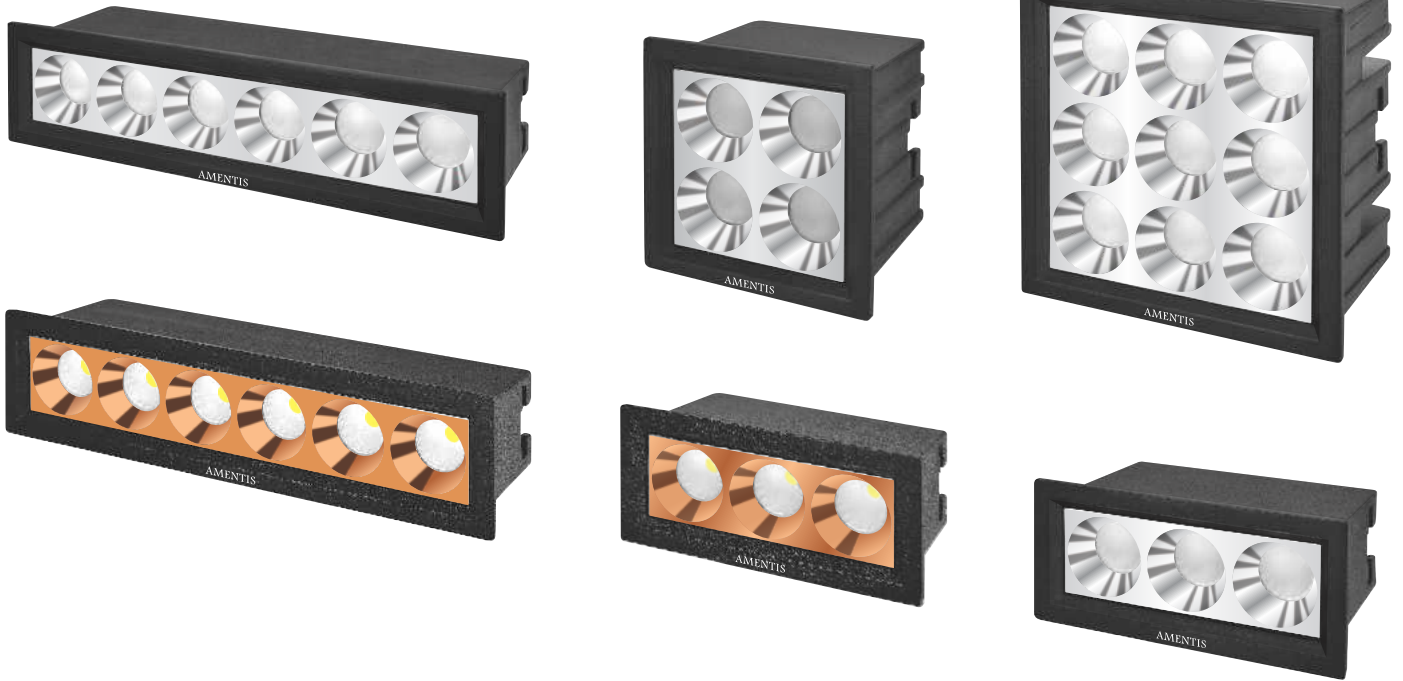

LINEA 20 SPOTLIGHT - SQUARE REFLECTOR

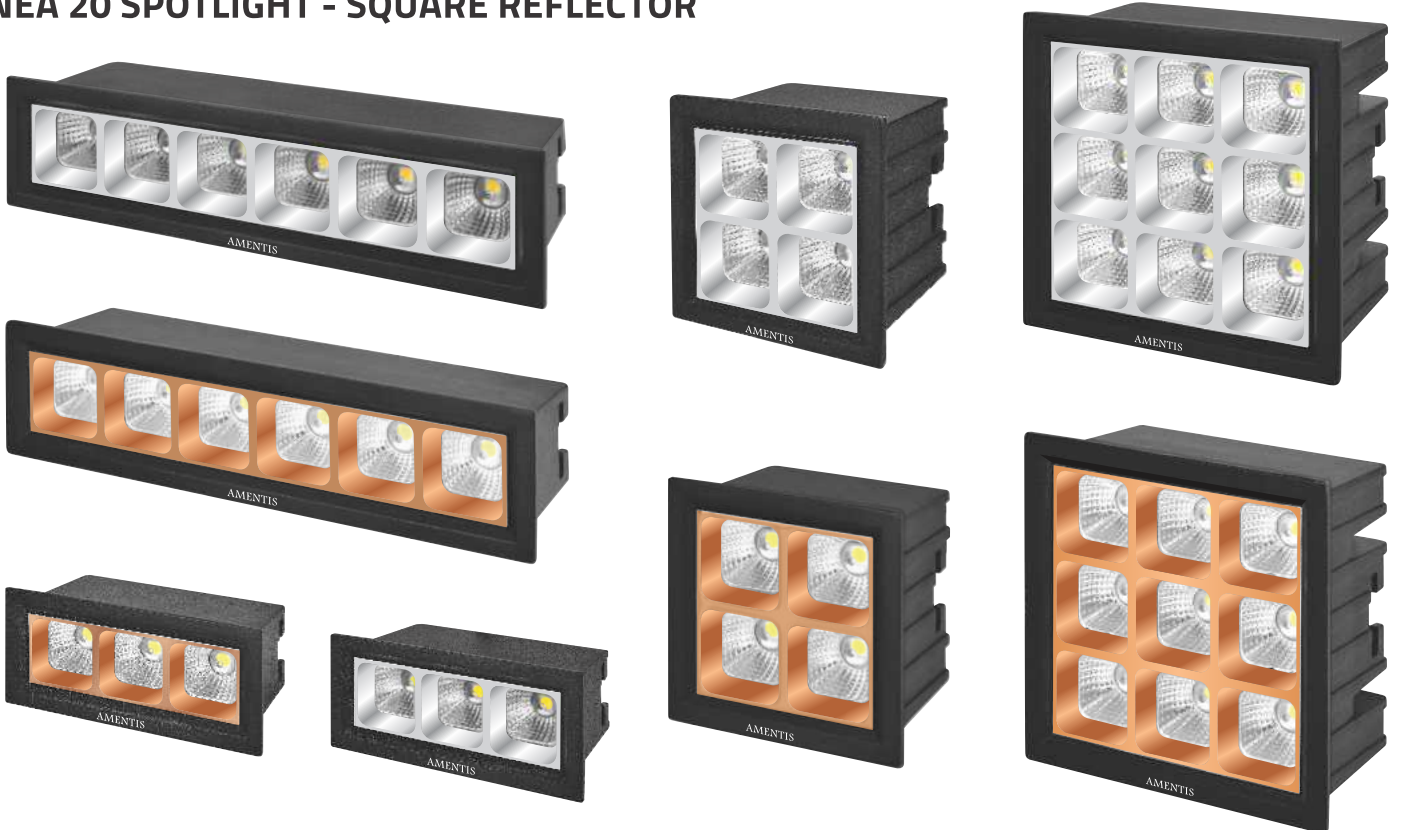



LINEA 20-SQUARE REFLECTOR


MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN20-6SR	3	6	74 x 34	66 x 25	40	40°
ALLN20-8SR	4	8	54 x 54	45 x 45	40	40°
ALLN20-12SR	6	12	134 x 33	125 x 26	40	40°
ALLN20-18SR	9	18	73 x 73	65 x 65	40	40°
ALLN20-20SR	12	20	COMING SOON			

SPECIAL REFLECTOR FOR SQUARE REFLECTION SPOT
 ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 40° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK

Control Type :




LINEA 30 SPOT LIGHT

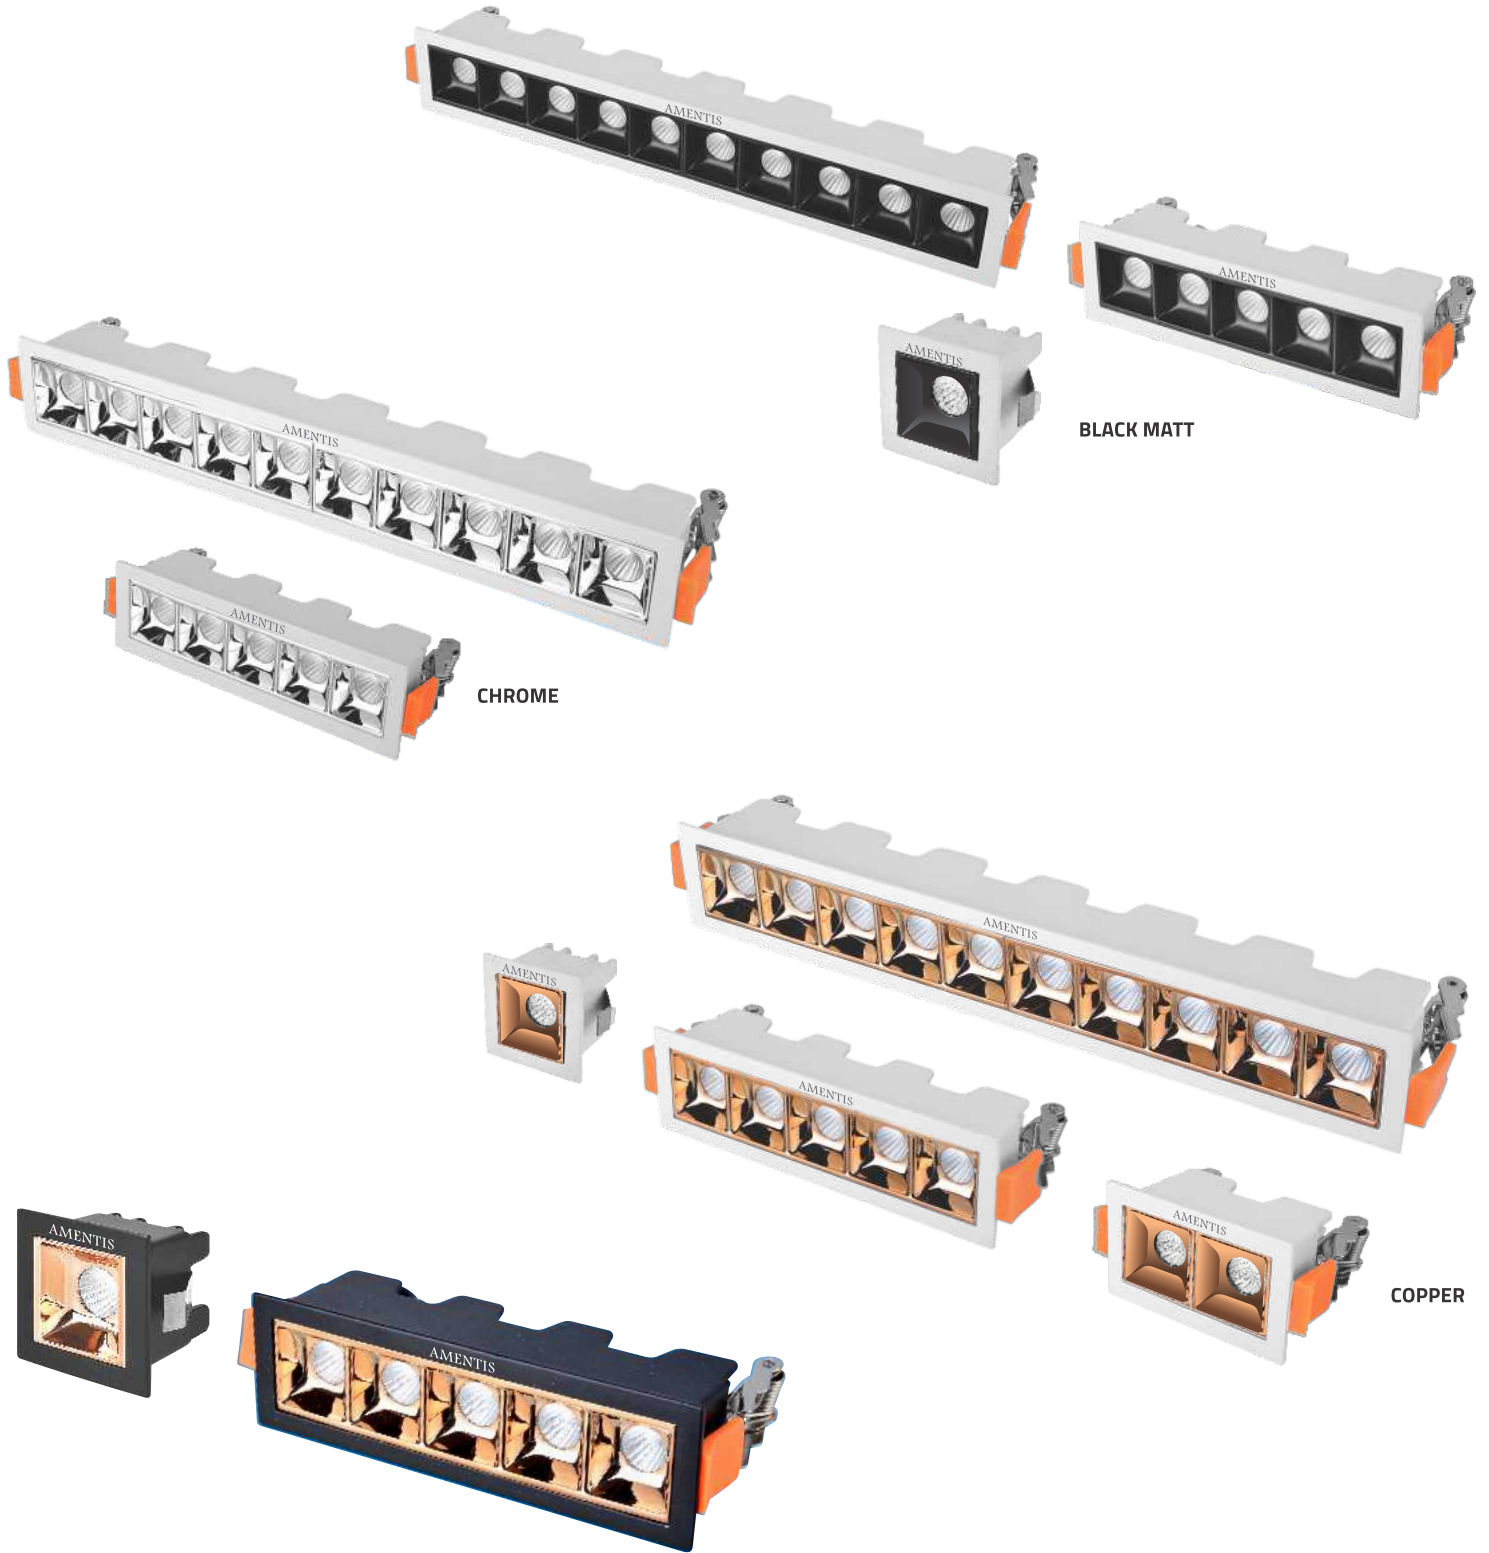


BLACK MATT

CHROME

COPPER

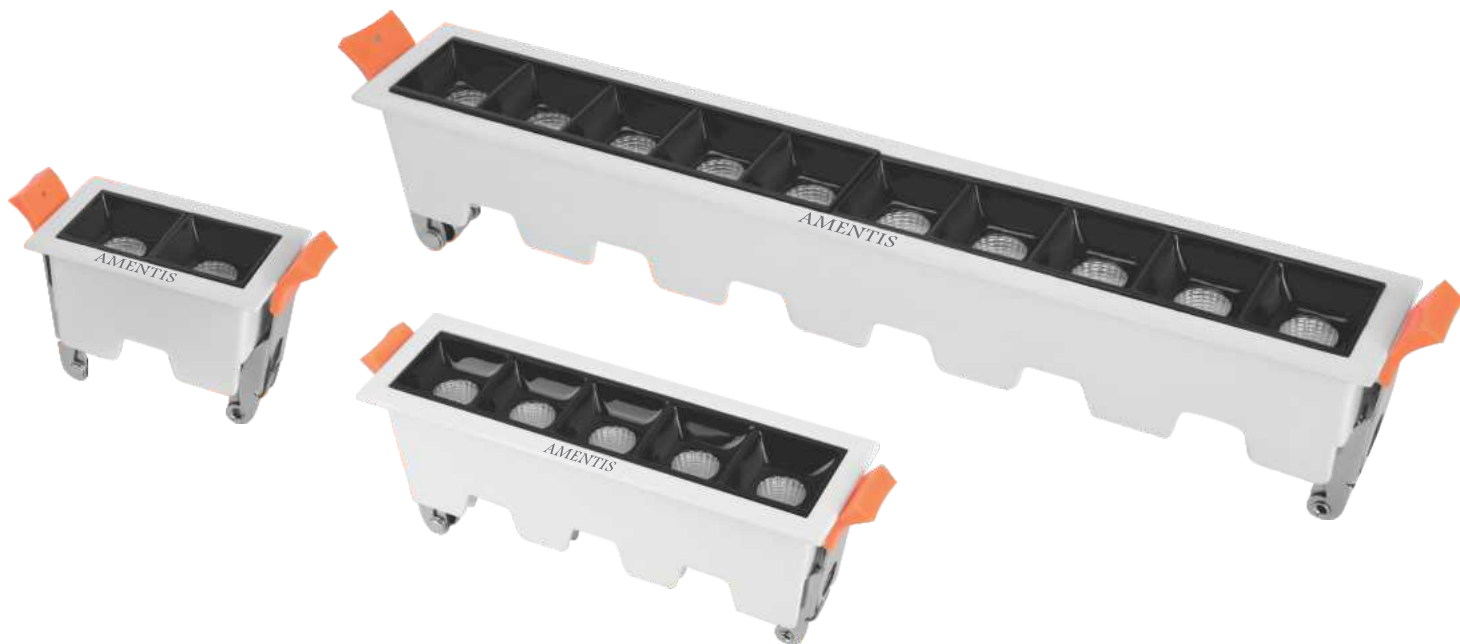

SIDE VIEW

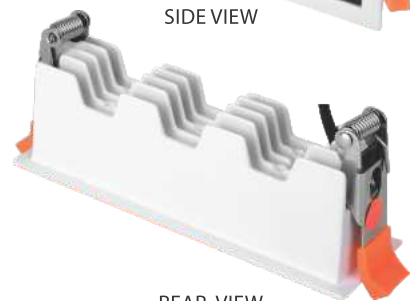

REAR VIEW




LINEA 30 SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN3S	1	3	44 x 44	34 x 34	40	30°
ALLN5S	2	5	74 x 44	65 x 35	40	30°
ALLN12S	5	12	146 x 44	137 x 35	40	30°
ALLN24S	10	24	281 x 44	271 x 35	40	30°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 REFLECTORS AVAILABLE :
 GLOSSY BLACK/ROSE GOLD/CHROME
 BEAM ANGLE 30° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :



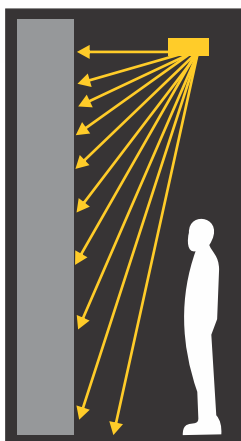


LED LINEA WALL WASHER

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALLNWW12	12	146 x 44	137 x 35	40
ALLNWW20	20	281 x 44	271 x 35	40


ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE ASYMETRIC
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK

Control Type :



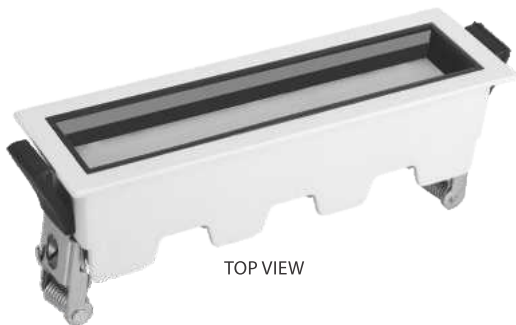

TOP VIEW

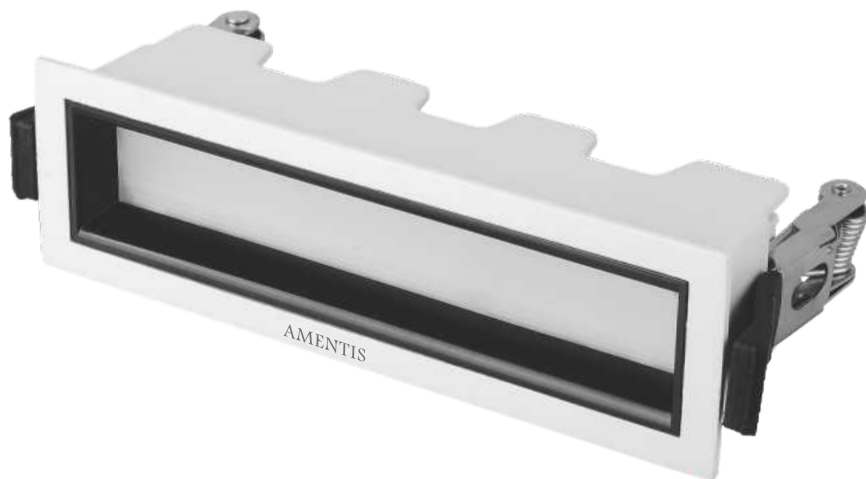

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK

LINEA DIFFUSED X

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN12DX	12	146 x 44	137 x 35	40	80°
ALLN20DX	20	281 x 44	271 x 35	40	80°

Control Type :





LINEA DIFFUSED

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN12DIF	12	146 x 44	137 x 35	40	80°
ALLN20DIF	20	281 x 44	271 x 35	40	80°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 80° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK

Control Type :



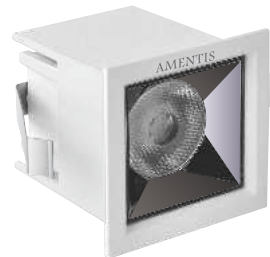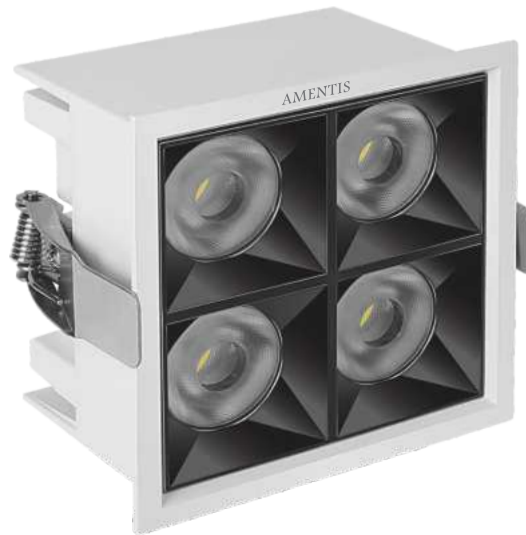

REAR VIEW


MAGIC LED SPOTLIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALMG4S	1	4	51 x 51	41 x 41	55	38°
ALMG12S	3	12	128 x 50	118 x 42	55	38°
ALMG16S	4	16	90 x 90	80 x 80	55	38°
ALMG20S	5	20	205 x 90	195 x 42	55	38°
ALMG36S	9	36	COMING SOON			
ALMG40S	10	40	COMING SOON			

COMPACT SIZE HIGH INTENSITY ANTIGLARE DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :



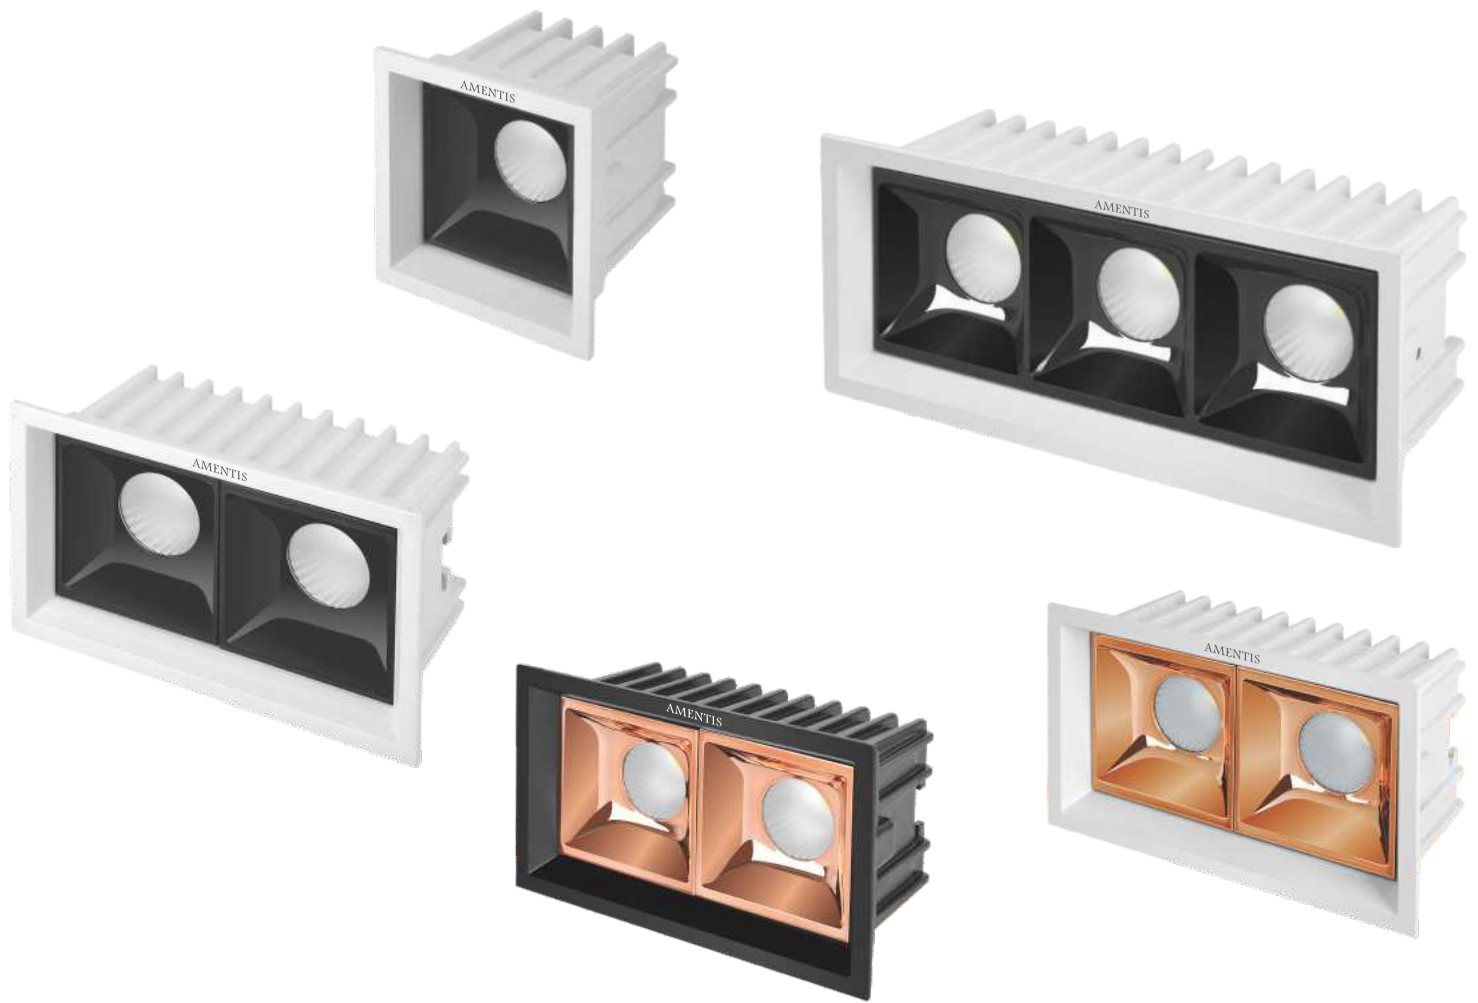

LINEA 50 SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN5008	1	8	70 x 70	60 x 60	60	45°
ALLN5016	2	16	120 x 70	110 x 60	60	45°
ALLN5020	3	20	162 x 70	152 x 60	60	45°
ALLN5006	1	6	70 x 70	60 x 60	60	45°
ALLN5012	2	12	120 x 70	110 x 60	60	45°
ALLN5018	3	18	162 x 70	152 x 60	60	45°

CREE COB USED IN 8, 16 WATT & 20 WATT

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140L M/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

BEAM ANGLE 45° AVAILABLE

USED FOR ANTIGLARE LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

CCT AVAILABLE: 3000K/4000K/5000K/6000K


PROTECTION RATING : IP20

FINISH AVAILABLE : PKW & BK

IN 3 MODULE ONLY BLACK REFLECTOR AVAILABLE

Control Type :



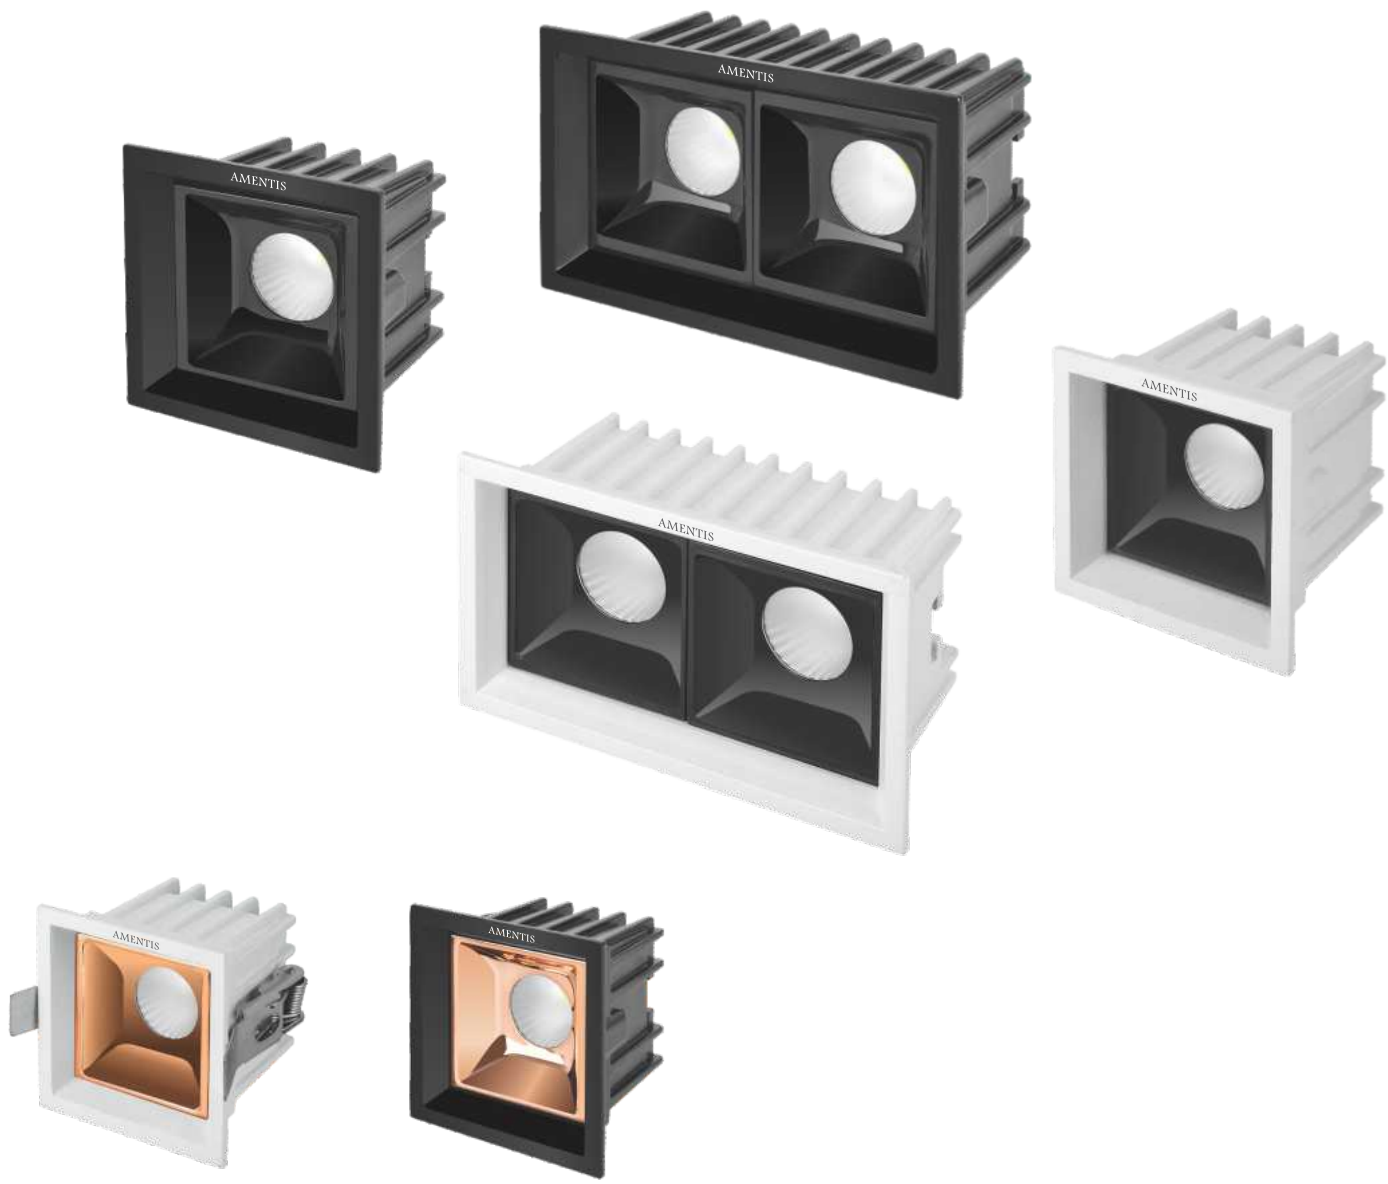

LINEA 70 SPOT LIGHT



MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALLN7015	1	15	90 x 90	80 x 80	75	45°
ALLN7030	2	30	160 x 90	150 x 80	75	45°
ALLN7012	1	12	90 x 90	80 x 80	75	45°
ALLN7020	2	20	160 x 90	150 x 80	75	45°

CREE COB USED IN 15 WATT & 30 WATT

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :



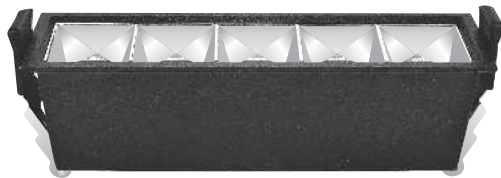

UGR<9
 ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 USED FOR ANTIGLARE LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

DIAMOND LINEA

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDI5S	2	5	73 x 43	65 x 35	48	38°
ALDI12S	5	12	164 x 44	155 x 35	48	38°

Control Type :





DARK LIGHT COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDL7R	7	63	53	76	25°
ALDL12R	12	83	74	98	38°
ALDL15R	15	83	74	98	38°
ALDL18R	18	83	74	98	38°

UGR<9

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140L M/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

USED FOR ANTIGLARE LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

CCT AVAILABLE: 3000K/4000K/5000K/6000K

PROTECTION RATING : IP20

FINISH AVAILABLE :PKW & BK

Control Type :





TOP VIEW



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140L M/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

CCT AVAILABLE: 3000K/4000K/5000K/6000K

PROTECTION RATING : IP20

FINISH AVAILABLE :PKW & BK

COOL COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALCL7R	7	64	60	59	25°
ALCL12R	12	81	76	70	38°
ALCL15R	15	81	76	85	38°



CHROME



GOLD



NICKEL



COPPER

Control Type :



DELTA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDEL7R	7	COMING SOON			
ALDEL12R	12	85	75	77	38°
ALDEL15R	15	85	75	92	38°



ALUMINIUM DIE-CAST MATERIAL

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140L M/W

BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

CCT AVAILABLE: 3000K/4000K/5000K/6000K

PROTECTION RATING : IP20

FINISH AVAILABLE :PKW & BK

Control Type :





REAR VIEW

COMPACT SIZE ANTIGLARE DOWNLIGHT
 LOW HEIGHT COB DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 REFLECTOR AVAILABLE: ROSE GOLD/CHROME
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :



CHROME REFLECTOR



COPPER REFLECTOR

OREO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORE10R	10	80	70	45	45°
ALORE15R	15	100	85	55	45°



ORO COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALORO10R	10	80	70	45	45°
ALORO15R	15	100	85	55	45°
ALORO20R	20	110	100	55	45°



TOP VIEW



REAR VIEW

COMPACT SIZE ANTIGLARE DOWNLIGHT
 LOW HEIGHT COB DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 REFLECTOR AVAILABLE: ROSE GOLD/CHROME
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK





TOP VIEW



REAR VIEW

TRIMLESS FLAVA COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALTFL12R	12	73	66	73	38°



TOP VIEW



REAR VIEW

FLAVA COB SPOTLIGHT - ROUND

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALFL3R	3	45	36	38	15°
ALFL7R	7	68	60	62	25°
ALFL12R	12	85	75	73	38°
ALFL15R	15	85	75	88	38°
ALFL18R	18	95	81	92	38°
ALFL28R	28	120	110	96	45°
ALFL36R	36	140	127	110	45°

FLAVA COB SPOTLIGHT - SQUARE

ALFL7S	7	68	60	62	25°
ALFL12S	12	85	75	73	38°
ALFL15S	15	85	75	88	38°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE : PKW & BK

Control Type :





REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK



GUSH COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALGU3R	3	50	32	24	15°
ALGU72R	7	68	60	60	25°
ALGU12R	12	85	75	65	38°
ALGU15R	15	85	75	80	38°
ALGU18R	18	95	83	81	38°
ALGU28R	28	120	110	96	45°




SOLIS COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALSO7R	7	68	56	60	25°
ALSO12R	12	76	68	60	38°
ALSO15R	15	76	68	75	38°



ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW & BK






REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :



DEEP FLAVA COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDFL12R	12	90	80	95	38°



DEEP COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALDE7R	7	71	62	70	25°
ALDE12R	12	82	75	85	38°
ALDE15R	15	82	75	100	38°



REAR VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :





RIO COB SPOT LIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALRI7R	7	COMING SOON			
ALRI12R	12	84	78	57	38°
ALRI15R	15	84	78	72	38°
ALRI18R	18	90	84	69	38°
ALRI28R	28	120	110	82	45°
ALRI36R	36	138	128	86	45°

ALUMINIUM DIE-CAST MATERIAL
 LOW HEIGHT TILTABLE INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :





ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

STAR COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALST12R	12	71	61	53	38°
ALST15R	15	71	61	68	38°
ALST18R	18	76	65	64	38°
ALST28R	28	104	90	75	45°
ALST36R	36	COMING SOON			

Control Type :





ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT Potted DRIVER Used
 USED FOR FOCUSED LIGHTING
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP44
 FINISH AVAILABLE :PKW+inner grey

IP44 COOL COB SPOTLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALCLIP12R	12	84	73	66	38°

Control Type :



TOP VIEW

L SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
L 107	9	50	162	25°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 25° AVAILABLE
 CONSTANT CURRENT DRIVER
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW-BK / BK-GD



ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : BK


OREO RD COB SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
ALOZ7R	7 WATT	35	92	45°
ALOZ12R	12 WATT	75	106	45°



OREO SQ COB SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
ALOS12S	12	74	95	45°



TOP VIEW

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 45° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW / BK

ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 USED FOR FOCUSED LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

Control Type :



TOP VIEW



LEAK CONCIL

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
L438	15 WATT	98	88	24+47	38°

ALUMINIUM DIE-CAST MATERIAL
 INDOOR SURFACE LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW

LEAK SURFACE

MODEL	WATT	OUTER	HEIGHT	BEAM ANGLE
L140	15	100	102	38°



TOP VIEW



360° ROTATABLE


ALUMINIUM DIE-CAST MATERIAL
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140LM/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 USED FOR FOCUSED LIGHTING
 COLOR AVAILABLE : WH/WW/NWH
 PROTECTION RATING: IP20
 FINISH AVAILABLE : PKW+BK : BK+GOLD

Control Type :



EVON PIPE

MODEL	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALEV12R	12	90	80	95	24°

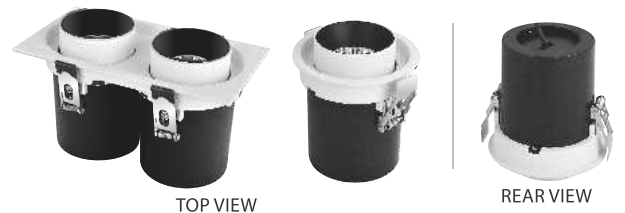

IN OUT PIPE COB SPOT LIGHT

MODEL	MODULE	WATT	OUTER	CUT OUT	HEIGHT	BEAM ANGLE
ALOR7R-1L	1	1 x 7	72	62	108	25°
ALOR7R-2L	2	2 x 7	132 x 72	123 x 62	110	25°
ALOR7R-3L	3	3 x 7	192 x 72	182 x 62	110	25°
ALOR12R-1L	1	1 x 12	100	90	120	38°
ALOR12R-2L	2	2 x 12	184 x 100	172 x 90	112	38°
ALOR12R-3L	3	3 x 12	269 x 100	257 x 90	112	38°

COMPACT SIZE HIGH INTENSITY ANTIGLARE DOWNLIGHT
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED REFLECTORS USED FOR OPTIMUM LIGHTING
 BEAM ANGLE 38° AVAILABLE
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK

Control Type :





OBYPRO SMD DOWNLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALOBP7R	7	80	72	44
ALOBP12R	12	100	92	55
ALOBP18R	18	100	91	55
ALOBP22R	22	124	104	55

ALUMINIUM DIE-CAST MATERIAL

Compact Size Led down Light

INDOOR RECESSED LIGHTING

BRANDED LED USED CRI>80;140L M/W

BRANDED Diffuser USED FOR OPTIMUM LIGHTING

CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE

CCT AVAILABLE: 3000K/4000K/5000K/6000K

PROTECTION RATING : IP20

FINISH AVAILABLE :PKW & BK

3cct Tunable and dimmable also available

Control Type :





ALUMINIUM DIE-CAST MATERIAL
 Compact Size Led down Light
 INDOOR RECESSED LIGHTING
 BRANDED LED USED CRI>80;140L M/W
 BRANDED Diffuser USED FOR OPTIMUM LIGHTING
 CONSTANT CURRENT DRIVER/BRANDED DRIVER AVAILABLE
 CCT AVAILABLE: 3000K/4000K/5000K/6000K
 PROTECTION RATING : IP20
 FINISH AVAILABLE :PKW & BK
 3cct Tunable and dimmable also available

OBY SMD DOWNLIGHT

MODEL	WATT	OUTER	CUT OUT	HEIGHT
ALOBY12R	12	120	108	53
ALOBY18R	18	153	142	57

Control Type :



TOP VIEW



REAR VIEW



IP 65 SURFACE P30

MODEL	WATT	OUTER	HEIGHT
ALP305R	5	57	15

ALUMINIUM DIE CAST
 IP65 FIXTURE
 SLIM HEIGHT
 USED FOR OUTDOOR APPLICATION

DIMMABLE DRIVER

CURRENT	VOLTAGE	DIMMING TYPE
150 Ma	8-43 V	TRIAC
200 Ma	8-43 V	TRIAC
250 Ma	8-43 V	TRIAC
300 Ma	8-40 V	TRIAC
300 Ma	40-65 V	TRIAC
350 Ma	8-40 V	TRIAC
400 Ma	8-40 V	TRIAC
500 Ma	8-40 V	TRIAC
700 Ma	8-26 V	TRIAC
700 Ma	26-43 V	TRIAC

CURRENT	VOLTAGE	DIMMING TYPE
300 Ma	30-60 V	0-10V
500 Ma	12-24 V	0-10V
700 Ma	18-36 V	0-10V
300 Ma	2-42 V	DALI
200/250 300/350 Ma	9-42 V	DALI
350/400 450/500 Ma	9-42 V	DALI
550/600 650/700 Ma	9-42 V	DALI
200/250 300/350 Ma	9-42 V	3 CCT DALI
350/400 450/500 Ma	9-42 V	3 CCT DALI



YSD SMPS

SLIM SERIES POWER SUPPLY



VOLTAGE	WATT
12V/24V	30
12V/24V	60
12V/24V	100
12V/24V	150
12V/24V	200
12V/24V	250
12V/24V	300
12V/24V	400

WATERPROOF SMPS



VOLTAGE	WATT
12V/24V	30
12V/24V	60
12V/24V	100
12V/24V	150
12V/24V	200
12V/24V	250
12V/24V	300

DIMMABLE SMPS 3 IN 1



VOLTAGE	WATT
12V/24V	60
12V/24V	100
12V/24V	150
12V/24V	200
12V/24V	250
12V/24V	300
12V/24V	350



STRIP LIGHT

WIDTH (SIZE IN MM)	NO. OF LED	VOLTAGE
5	120	12V/24V
8	192	12V/24V
8	180	12V/24V
10	COB	12V/24V
5	COB	24V
10	COB RGB	24V

3535 HIGH POWER RGB STRIP

WIDTH (SIZE IN MM)	NO. OF LED	VOLTAGE
10	120	12V

20 METER DROPLESS STRIP

WIDTH (SIZE IN MM)	NO. OF LED	VOLTAGE
10	120	24V

A young woman with dark hair tied up is sitting on a rooftop at night. She is wearing a white t-shirt with the text 'EMPTY YOUR MIND' and blue shorts. She is holding a string of warm white LED lights that form two star shapes. The background is a blurred city skyline with various colored lights. The overall mood is artistic and serene.

THE LIGHTING PEOPLE

An artistic design of LED Lights and accessories to give the pleasure of elegance and beauty to your modern homes.



AMENTIS 

THE LIGHTING PEOPLE

Disclaimer : Product and accessories shown in this catalog may change due to continuous research and development.
Company may change or alter any model without prior notice.